

WINCO®

HPS12000HE

Features

Honda GX630 Engine

You expect the best; you get the best. The Honda GX630 engine has more power, lower fuel consumption, and lower emissions than previous versions.

Tri-Fuel

Designed to easily transition between three fuel sources; LP, natural gas, and gasoline.

Low Oil Protection

In the event there is a low oil level, the engine will shut down, to protect the engine from damage.

Sturdy Wrap-Around Welded Tubular Cradle

We use 14 gauge steel for dependable durability.

15 Gallon Fuel Tank

The EPA-approved steel fuel tank design eliminates hydrocarbon emissions.

Four Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

Premium Square D Circuit Breakers

Square D is the industry leader in circuit breaker protection.


100% Load Tested

Every generator is fully tested prior to leaving our facility.

HOME POWER®

12,000 Surge Watts

10,800 Continuous Watts

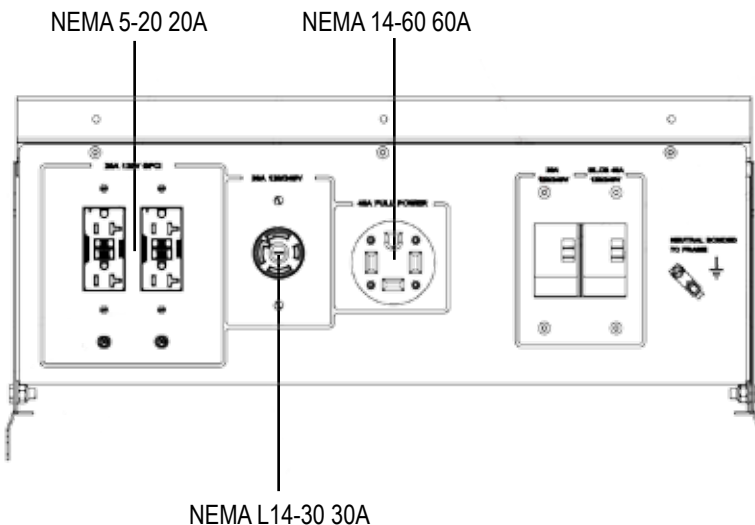

Optional Accessories

Generator Cover

When your generator is not in use, a cover will keep it dust and debris free.

Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

WINCO Emergency Transfer Service Kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

60 Amp (NEMA 14-60P) Plug

You supply the length of cord you need. We offer the plug.

Low Pressure Fuel Solenoid

For peace of mind when you have to run your generator unattended.

Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

Battery

Interstate U1 300 CCA.

GENERATOR

SURGE WATTS ⁽¹⁾	12,000
CONTINUOUS WATTS ⁽¹⁾	10,800
CONTINUOUS AMPS ⁽¹⁾	90/45
OUTPUT	120/240 V
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	45 AMP
NEUTRAL BONDED	YES
120 VOLT RECEPTACLES	(2) NEMA 5-20 20A DUPLEX
120/240 VOLT RECEPTACLES	(1) NEMA L14-30 30A (1) NEMA 14-60 60A
LIFTING EYE	NO
4-WHEEL DOLLY KIT	STANDARD
PROTECTIVE ROLL FRAME	14 GAUGE STEEL
GENERATOR WARRANTY ⁽²⁾	2 YRS RESIDENTIAL

NOTES: (1) Based on gasoline fuel. Derate 10% for LP Gas and 20% for Natural Gas. (2) For complete generator warranty information, refer to the HPS12000HE manual.

SHIPPING

DIMENSIONS (LxWxH)(W/ DOLLY KIT)	44.7" x 36" x 33"
NET WEIGHT	425 LBS
SHIPPING DIMENSIONS	50" x 40" x 36"
SHIP WEIGHT	460 LBS
FREIGHT CLASS	70

ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GX630
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
DISPLACEMENT/TYPE	688 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL	10W-30
OIL CAPACITY	1.7 QTS
dBA AT 7 METERS	78
MOTOR STARTING (CODE G) ⁽¹⁾	5 HP
BATTERY SIZE ⁽²⁾	BCI U1 300 CCA
EPA APPROVED	YES
CARB APPROVED	NO
CSA APPROVED	NO
UL LISTED	NO
ENGINE WARRANTY ⁽³⁾	3 YRS RESIDENTIAL

NOTES: (1) Code G capacitor start motor. (2) Battery not included (3) Contact your local Honda service center for engine warranty assistance.

FUEL

FUEL TANK	15 GAL
FUEL GAUGE	ON TANK
FUEL USE: GASOLINE	1.67 GAL/HR
NATURAL GAS	200 FT ³ /HR - 204,000 BTU/HR
LP	2.2 GAL/HR - 201,304 BTU/HR



Specifications are subject to change without notice.

225 S. Cordova Ave Le Center, MN 56057 • 1-800-733-2112 • www.wincogen.com