

Features

Non-Fusible

Manually connect or disconnect the load from the source.

Double Throw Switch

Visible blades for positive indication that the switch is ON or OFF.

UL Listed

Suitable for use as service equipment.

NEMA 3R Outdoor Enclosure


Corrosion resistant, baked enamel for an incredibly durable finish.

Tangential Knockouts

Eliminate the need for conduit offsets or bends.




**100-200 AMP
1 PH & 3 PH**

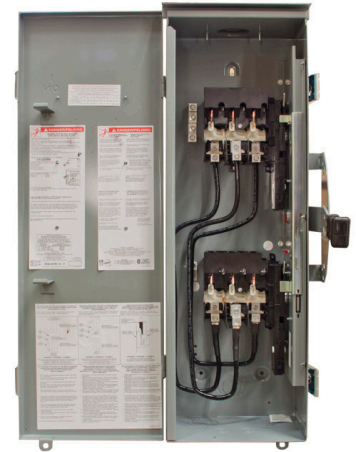


SPECIFICATIONS

MODEL	VOLTS	POLES	AMPS	ENCLOSURE	DIMENSIONS (H x W x W/H x D)	SHIPPING WEIGHT (lbs)
64863-005	240	2	100	NEMA 3R	30.5" x 10.25" x 12" x 6.93"	36
64863-009	240	3	100	NEMA 3R	30.5" x 10.25" x 12" x 6.93"	40
64863-006	240	2	200	NEMA 3R	32.5" x 20.63" x 24" x 10.63"	70
64863-008	240	3	200	NEMA 3R	32.5" x 24.5" x 26.25" x 10.63"	80
64863-010	480	3	200	NEMA 3R	32.5" x 20.63" x 24" x 10.63"	80

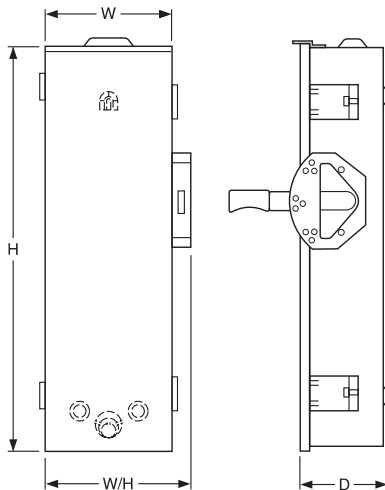

100 AMP

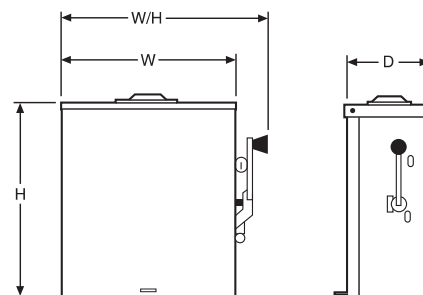

200 AMP